


Darlington

# 2SD2560




Silicon NPN Triple Diffused Planar Transistor (Complement to type 2SB1647)

Application : Audio, Series Regulator and General Purpose

Absolute maximum ratings (Ta=25°C)		
Symbol	Ratings	Unit
V <sub>CB0</sub>	150	V
V <sub>CE0</sub>	150	V
V <sub>EB0</sub>	5	V
I <sub>C</sub>	15	A
I <sub>B</sub>	1	A
P <sub>C</sub>	130(T <sub>C</sub> =25°C)	W
T <sub>J</sub>	150	°C
T <sub>stg</sub>	-55to+150	°C

Electrical Characteristics (Ta=25°C)			
Symbol	Conditions	Ratings	Unit
I <sub>CB0</sub>	V <sub>CB</sub> =150V	100max	A
I <sub>EB0</sub>	V <sub>EB</sub> =5V	100max	A
V <sub>(BR)CEO</sub>	I <sub>C</sub> =30mA	150min	V
h <sub>FE</sub>	V <sub>CE</sub> =4V, I <sub>C</sub> =10A	5000min*	
V <sub>CE(sat)</sub>	I <sub>C</sub> =10A, I <sub>B</sub> =10mA	2.5max	V
V <sub>BE(sat)</sub>	I <sub>C</sub> =10A, I <sub>B</sub> =10mA	3.0max	V
f <sub>T</sub>	V <sub>CE</sub> =12V, I <sub>E</sub> =-2A	70typ	MHz
COB	V <sub>CB</sub> =10V, f=1MHz	120typ	pF

External Dimensions MT-100(TO3P)

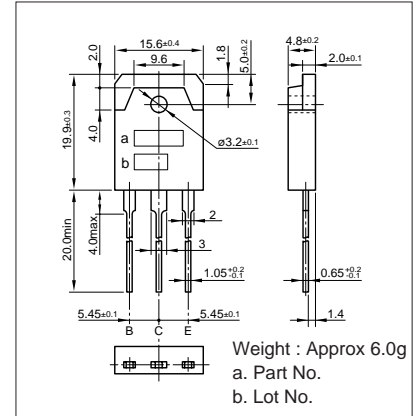


Typical Switching Characteristics (Common Emitter)


V <sub>CC</sub> (V)	R <sub>L</sub> (Ω)	I <sub>C</sub> (A)	V <sub>BB1</sub> (V)	V <sub>BB2</sub> (V)	I <sub>B1</sub> (mA)	I <sub>B2</sub> (mA)	t <sub>on</sub> (s)	t <sub>stg</sub> (s)	t <sub>f</sub> (s)
40	4	10	10	-5	10	-10	0.8typ	4.0typ	1.2typ

\*h<sub>FE</sub> Rank  $\bar{O}$ (5000to12000), P(6500to20000), Y(15000to30000)


I<sub>C</sub>-V<sub>CE</sub> Characteristics (Typical)

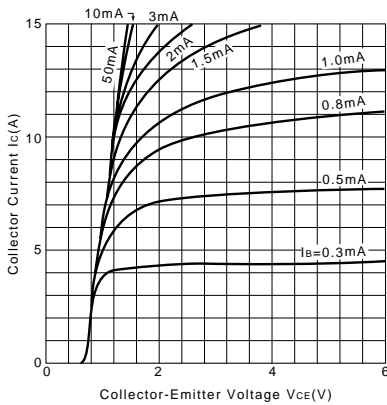


V<sub>CE(sat)</sub>-I<sub>B</sub> Characteristics (Typical)

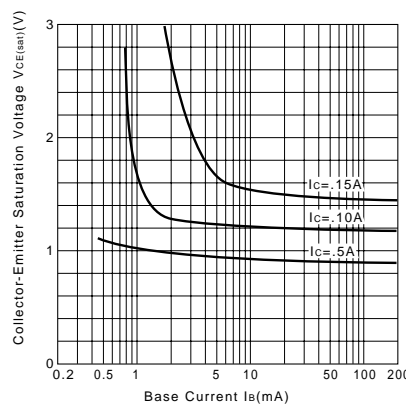


I<sub>C</sub>-V<sub>BE</sub> Temperature Characteristics (Typical)

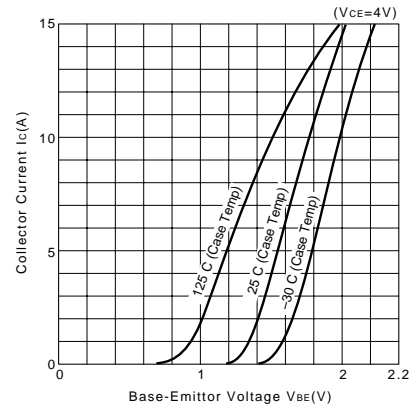


h<sub>FE</sub>-I<sub>C</sub> Characteristics (Typical)

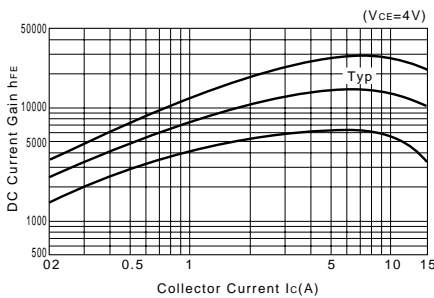


h<sub>FE</sub>-I<sub>C</sub> Temperature Characteristics (Typical)

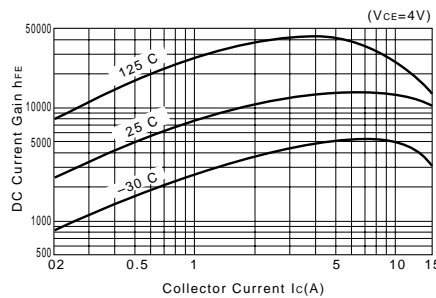


j<sub>a</sub>-t Characteristics

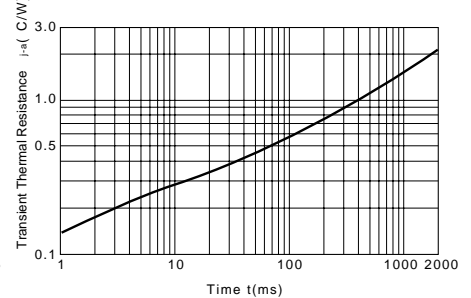


f<sub>T</sub>-I<sub>E</sub> Characteristics (Typical)

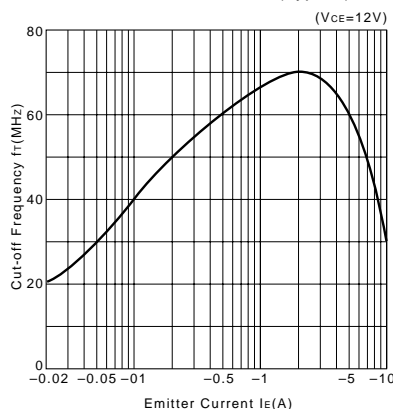

Safe Operating Area (Single Pulse)

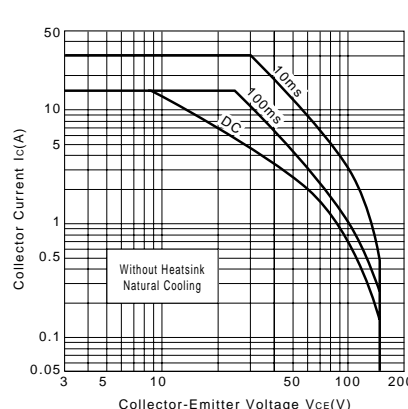


P<sub>C</sub>-T<sub>a</sub> Derating

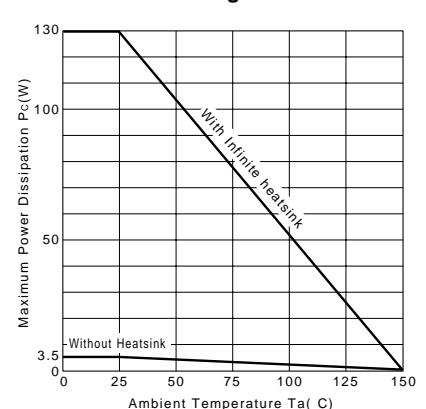

Darlington

# 2SB1647



Silicon PNP Epitaxial Planar Transistor (Complement to type 2SD2560)

Application : Audio, Series Regulator and General Purpose

Absolute maximum ratings (Ta=25°C)


Symbol	Ratings	Unit
V <sub>CB0</sub>	-150	V
V <sub>CE0</sub>	-150	V
V <sub>EB0</sub>	-5	V
I <sub>C</sub>	-15	A
I <sub>B</sub>	-1	A
P <sub>C</sub>	130(T <sub>C</sub> =25°C)	W
T <sub>J</sub>	150	°C
T <sub>stg</sub>	-55 to +150	°C

Electrical Characteristics (Ta=25°C)

Symbol	Conditions	Ratings	Unit
I <sub>CB0</sub>	V <sub>CB</sub> =-150V	-100max	A
I <sub>EB0</sub>	V <sub>EB</sub> =-5V	-100max	A
V <sub>(BR)CEO</sub>	I <sub>C</sub> =-30mA	-150min	V
h <sub>FE</sub>	V <sub>CE</sub> =-4V, I <sub>C</sub> =-10A	5000min*	
V <sub>CE(sat)</sub>	I <sub>C</sub> =-10A, I <sub>B</sub> =-10mA	-2.5max	V
V <sub>BE(sat)</sub>	I <sub>C</sub> =-10A, I <sub>B</sub> =-10mA	-3.0max	V
f <sub>T</sub>	V <sub>CE</sub> =-12V, I <sub>E</sub> =2A	45typ	MHz
C <sub>OB</sub>	V <sub>CB</sub> =-10V, f=1MHz	320typ	pF

\*h<sub>FE</sub> Rank O(5000to12000), P(6500to20000), Y(15000to30000)


External Dimensions MT-100(TO3P)

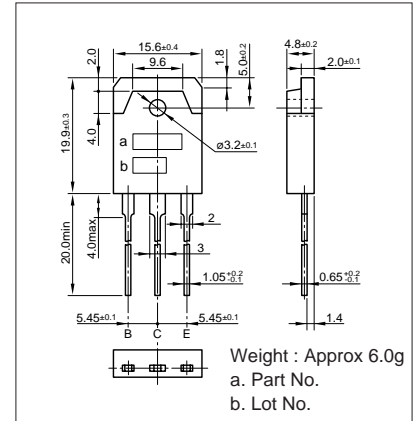


Typical Switching Characteristics (Common Emitter)

V <sub>CC</sub> (V)	R <sub>L</sub> (Ω)	I <sub>C</sub> (A)	V <sub>BB1</sub> (V)	V <sub>BB2</sub> (V)	I <sub>B1</sub> (mA)	I <sub>B2</sub> (mA)	t <sub>on</sub> (s)	t <sub>stg</sub> (s)	t <sub>f</sub> (s)
-40	4	10	-10	5	-10	10	0.7typ	1.6typ	1.1typ


I<sub>C</sub>-V<sub>CE</sub> Characteristics (Typical)

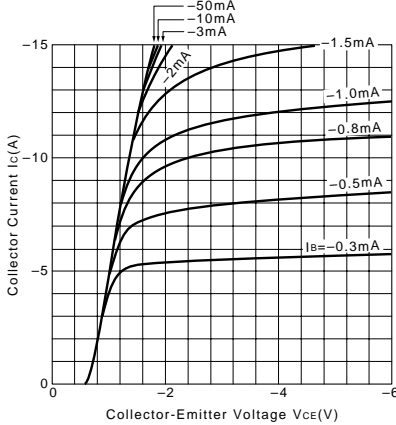


V<sub>CE(sat)</sub>-I<sub>B</sub> Characteristics (Typical)

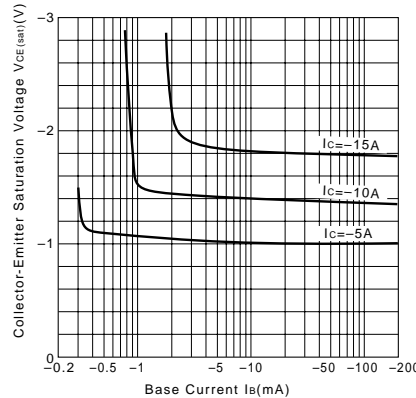


I<sub>C</sub>-V<sub>BE</sub> Temperature Characteristics (Typical)

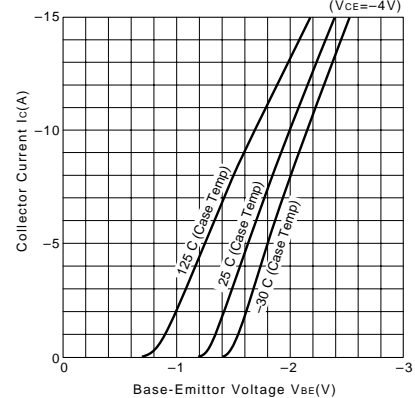


h<sub>FE</sub>-I<sub>C</sub> Characteristics (Typical)

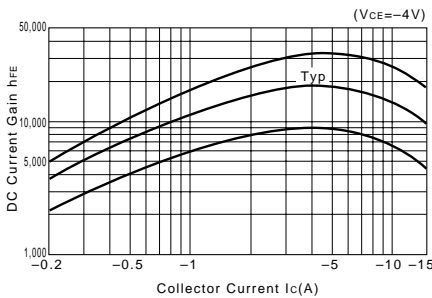


h<sub>FE</sub>-I<sub>C</sub> Temperature Characteristics (Typical)

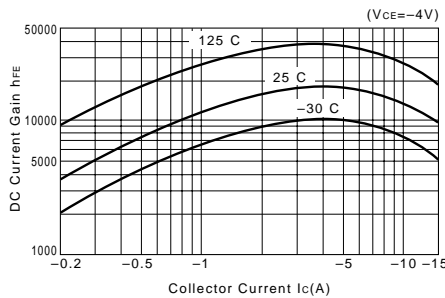


j<sub>a</sub>-t Characteristics

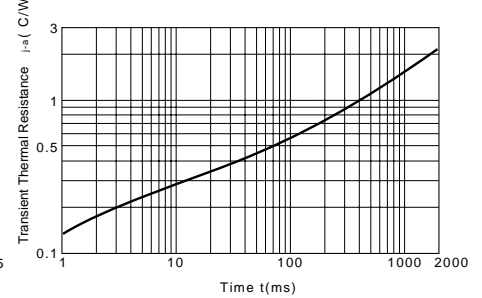

f<sub>T</sub>-I<sub>E</sub> Characteristics (Typical)

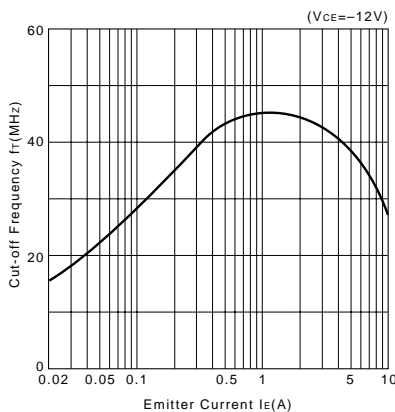

Safe Operating Area (Single Pulse)

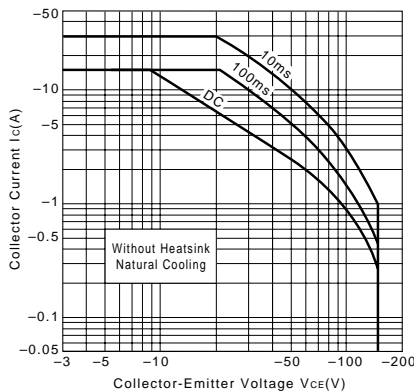

P<sub>C</sub>-T<sub>a</sub> Derating

