

Lithium Ion Rechargeable Battery Technical Information

**Revision 1.0
13th May 2015**

Model Number	US18650VTC5A
Cell Type	Cylindrical
Cell Name	US18650VTC5A
Sony Code	49934720

**Sony Energy Devices Corporation
Device Solutions Business Group / Sony Corporation**

1. General

1.1 Name and Code

1.1.1 Model Number : US18650VTC5A
1.1.2 Cell Name : US18650VTC5A
1.1.3 Sony Code : 49934720

1.2 Cell Shape and Weight

1.2.1 Cell Shape : Cylindrical
1.2.2 Size (with plastic tube) : Diameter 18.50mm max
Length 65.20mm max
1.2.3 Weight : 47.1g Average

1.3 Safety Regulation

: Sony acquired UL1642.
: Sony acquired IEC62133 2nd edition.
: Sony acquired Korean regulation.
: Sony acquired Taiwan Commodity
Inspection Act(CNS 15364)


2. Performance

Nominal Capacity at 0.2ItA	2600mAh 9.36Wh	discharge 2.0V cut off at 23°C
Rated Capacity at 0.2ItA	2500mAh 9.0Wh	discharge 2.0V cut off at 23°C
Capacity at 1ItA (typ.)	2524mAh 9.05Wh	discharge 2.5V cut off at 23°C
Capacity at 10A (typ.)	2516mAh 8.66Wh	discharge 2.5V cut off at 23°C
Nominal Voltage	3.6V	
Internal Impedance	10mΩ Typ.	measured by AC1kHz
Cycle Performance	70% Min. of Initial capacity at 500 cycles	10A discharge


* Standard Charge Condition

Charge Method : constant current constant voltage
Charge Up Voltage : 4.2± 0.05V
Charge Current : 2.5A
Charge Time : 2.5h
Ambient Temperature : 23°C


Charge Characteristics (US18650VTC5A)

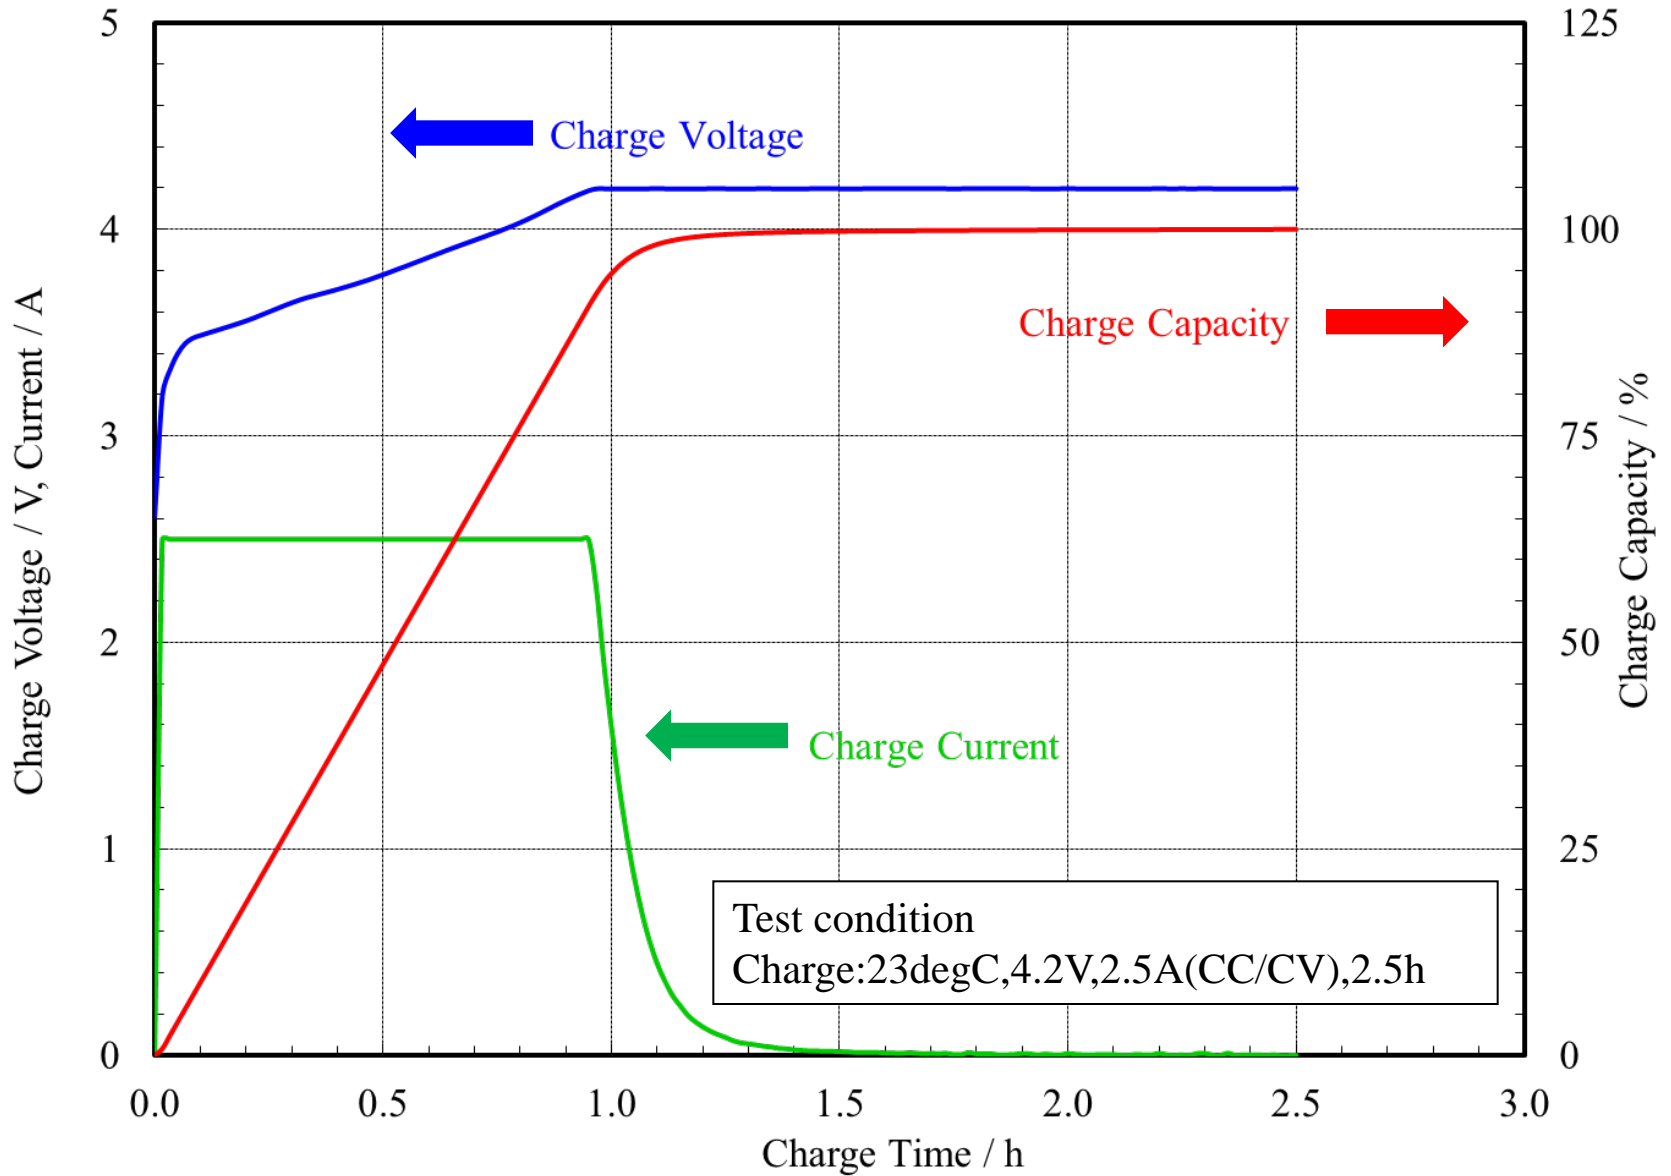


Discharge Load Characteristics (US18650VTC5A)

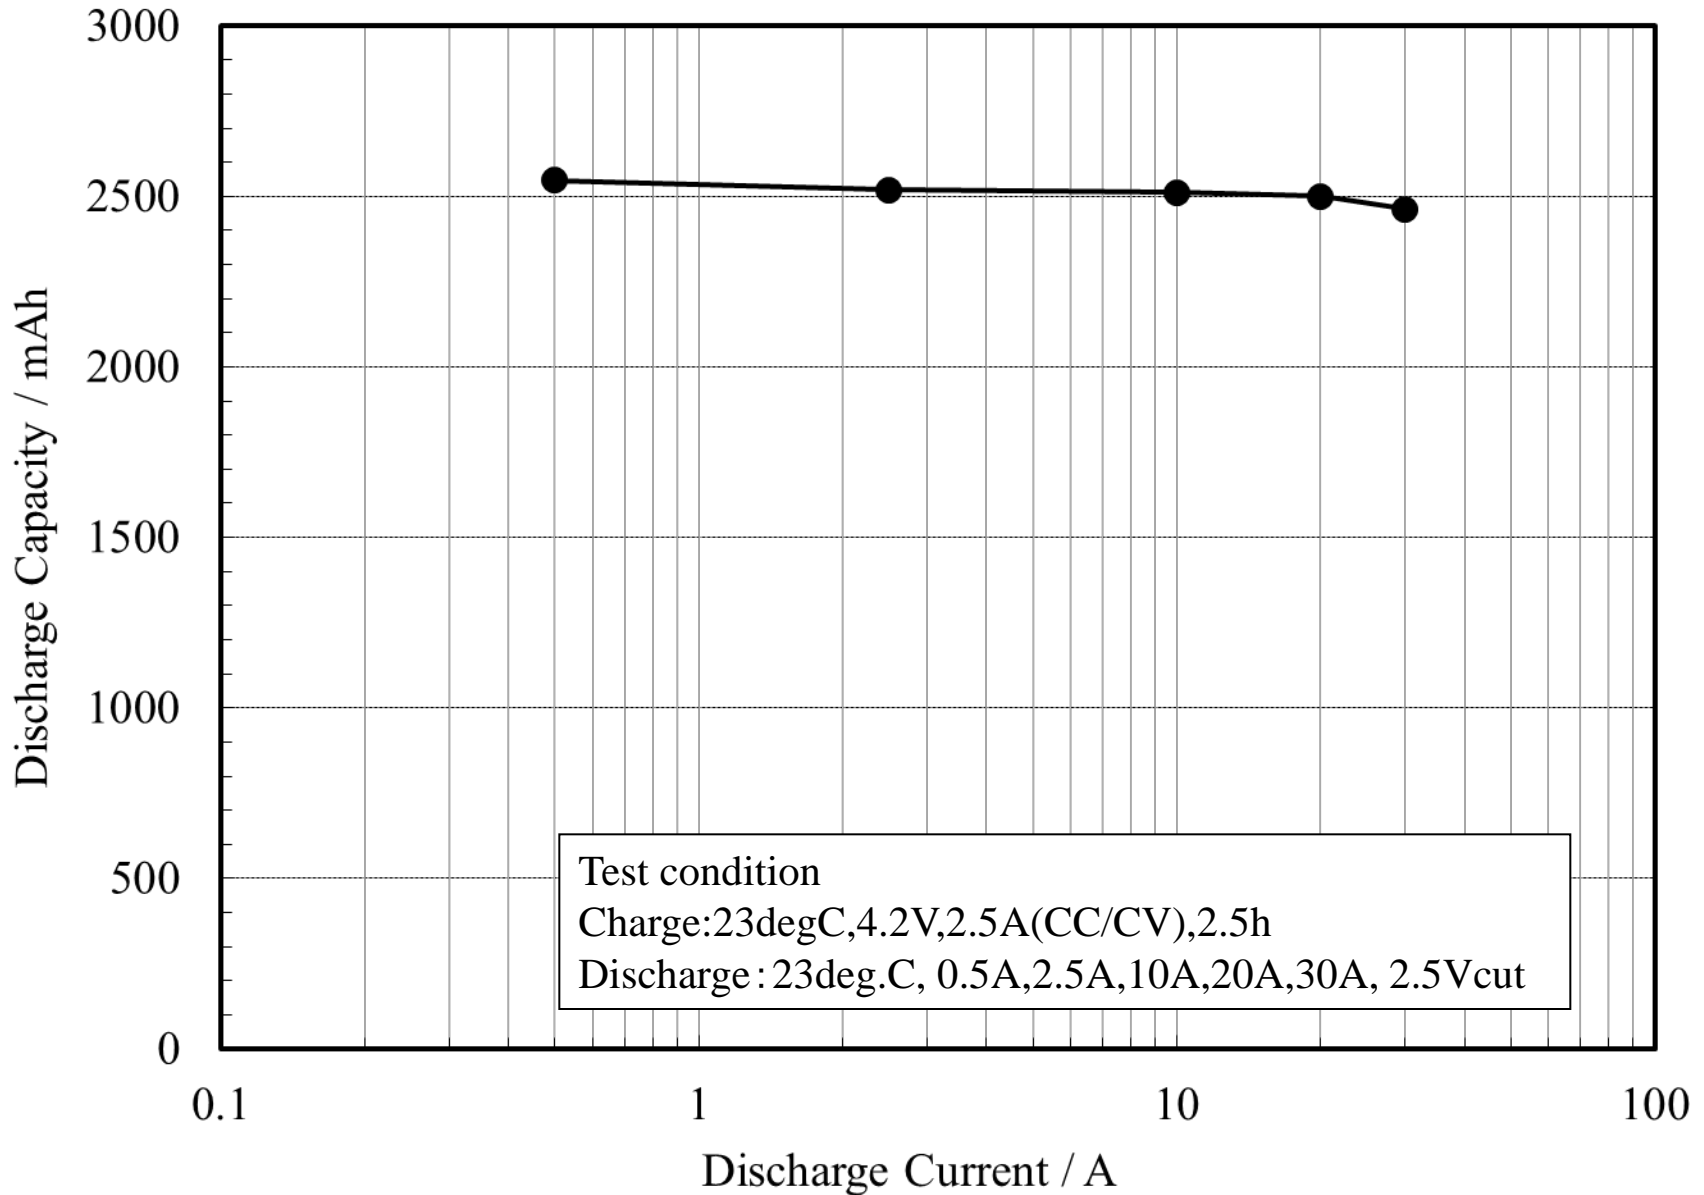


Discharge Load Characteristics (US18650VTC5A)

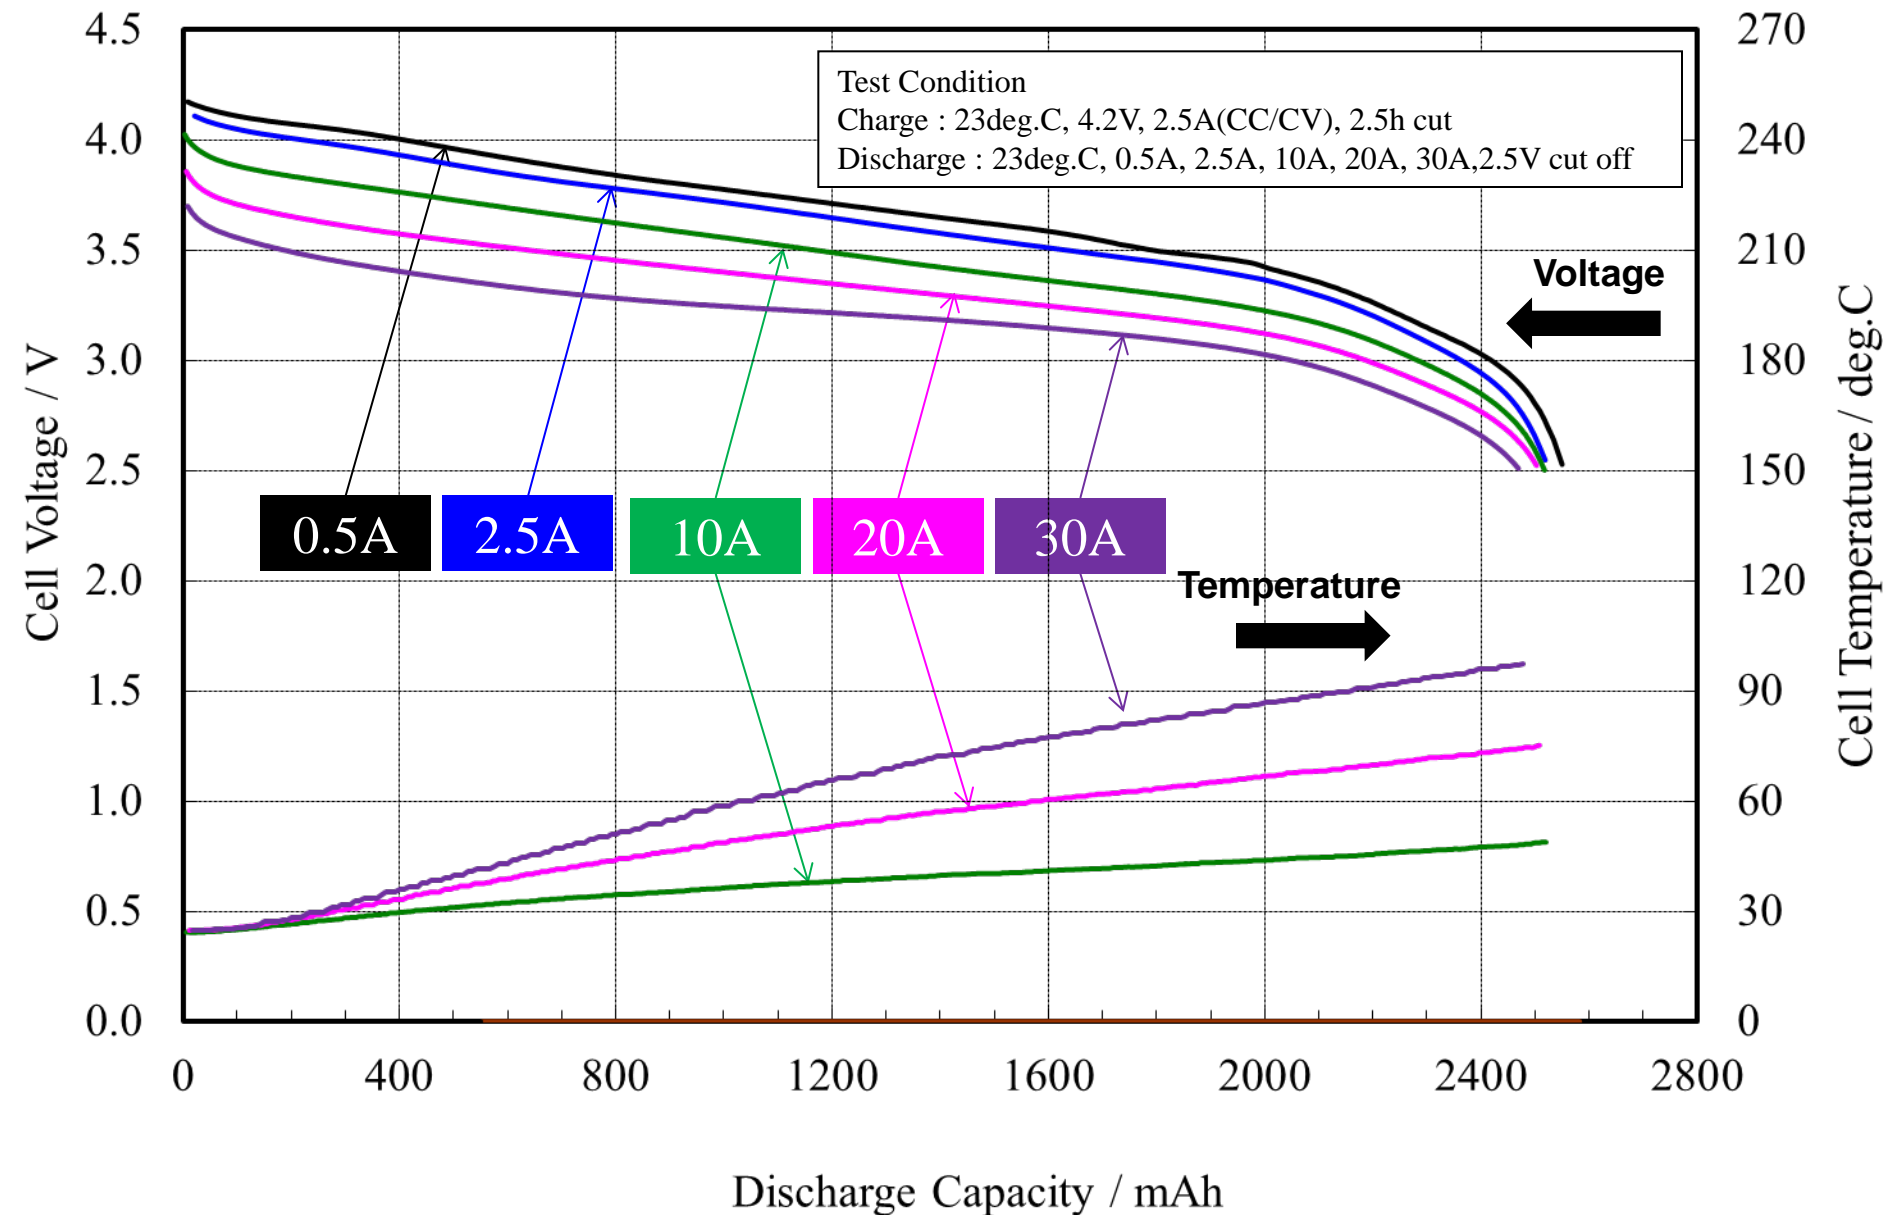

Temperature Dependence of Discharge Capacity (US18650VTC5A)

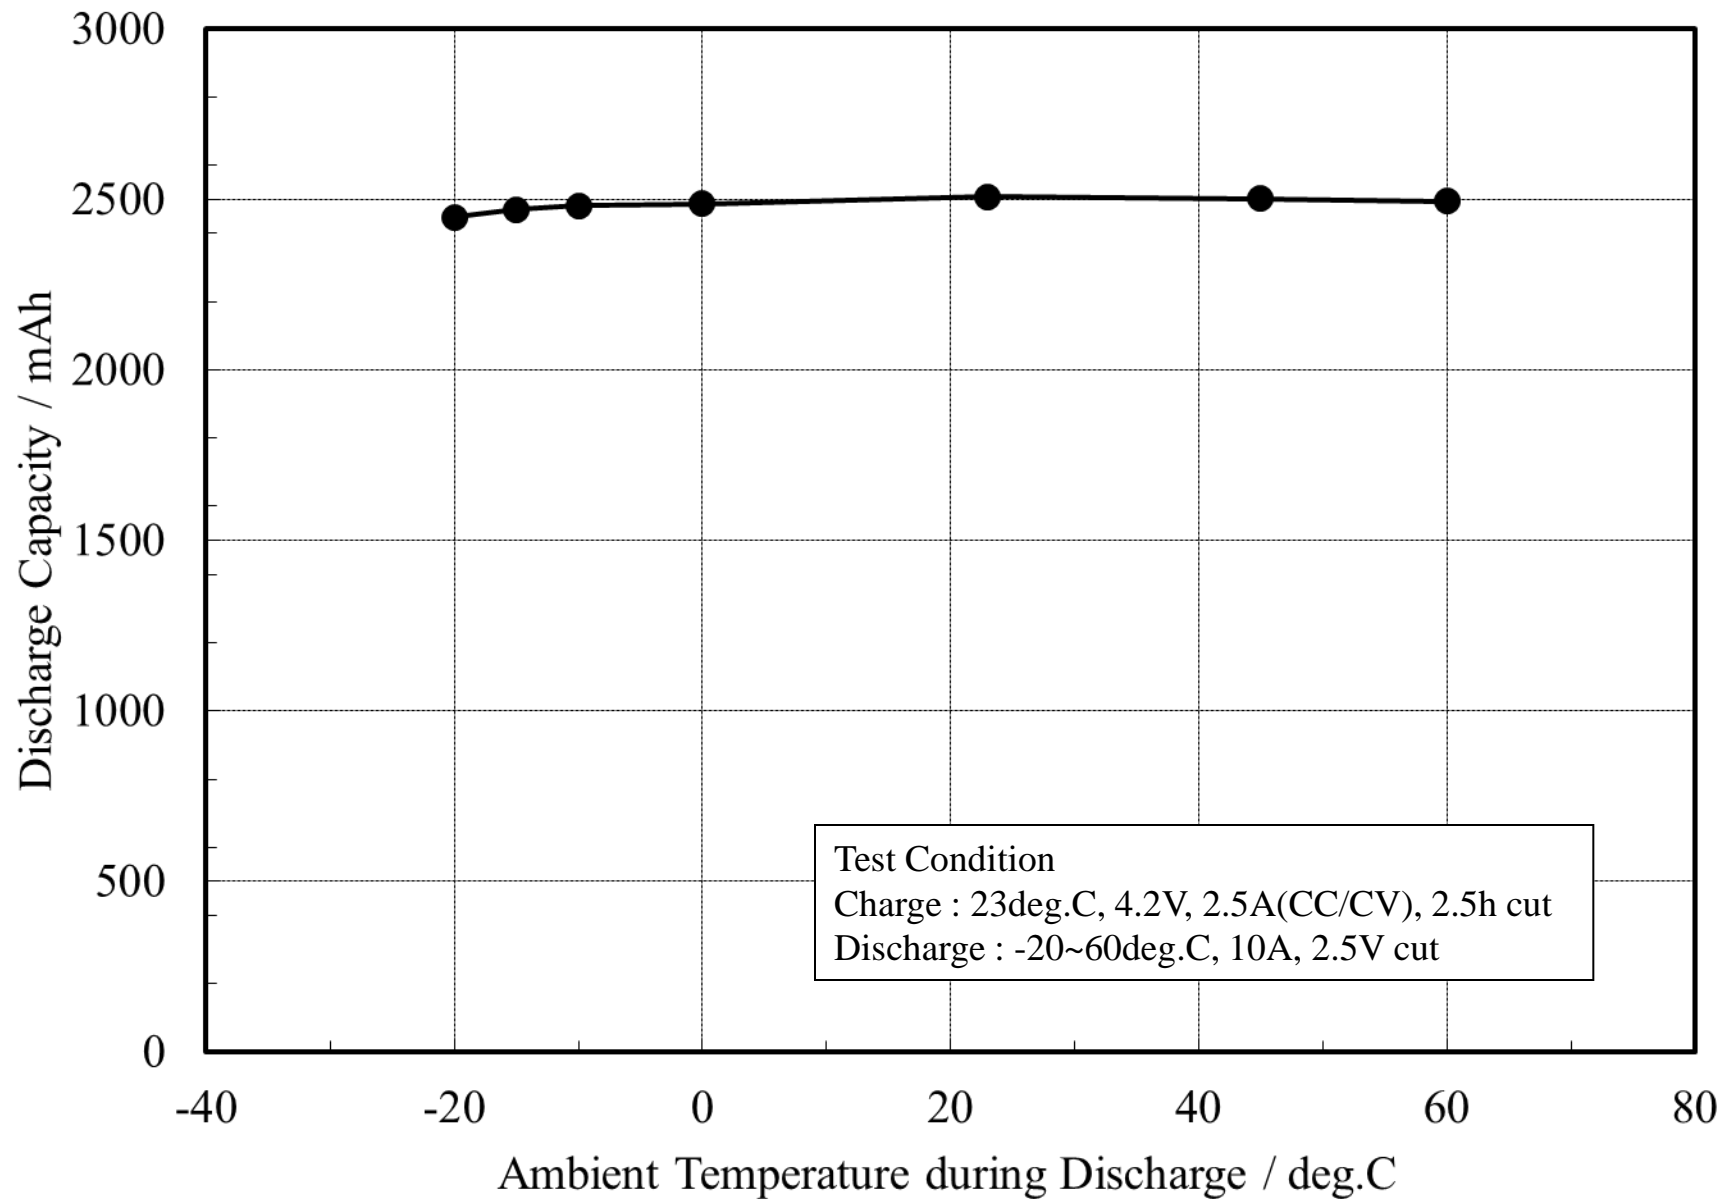


Temperature Dependence of Discharge Curves (US18650VTC5A)

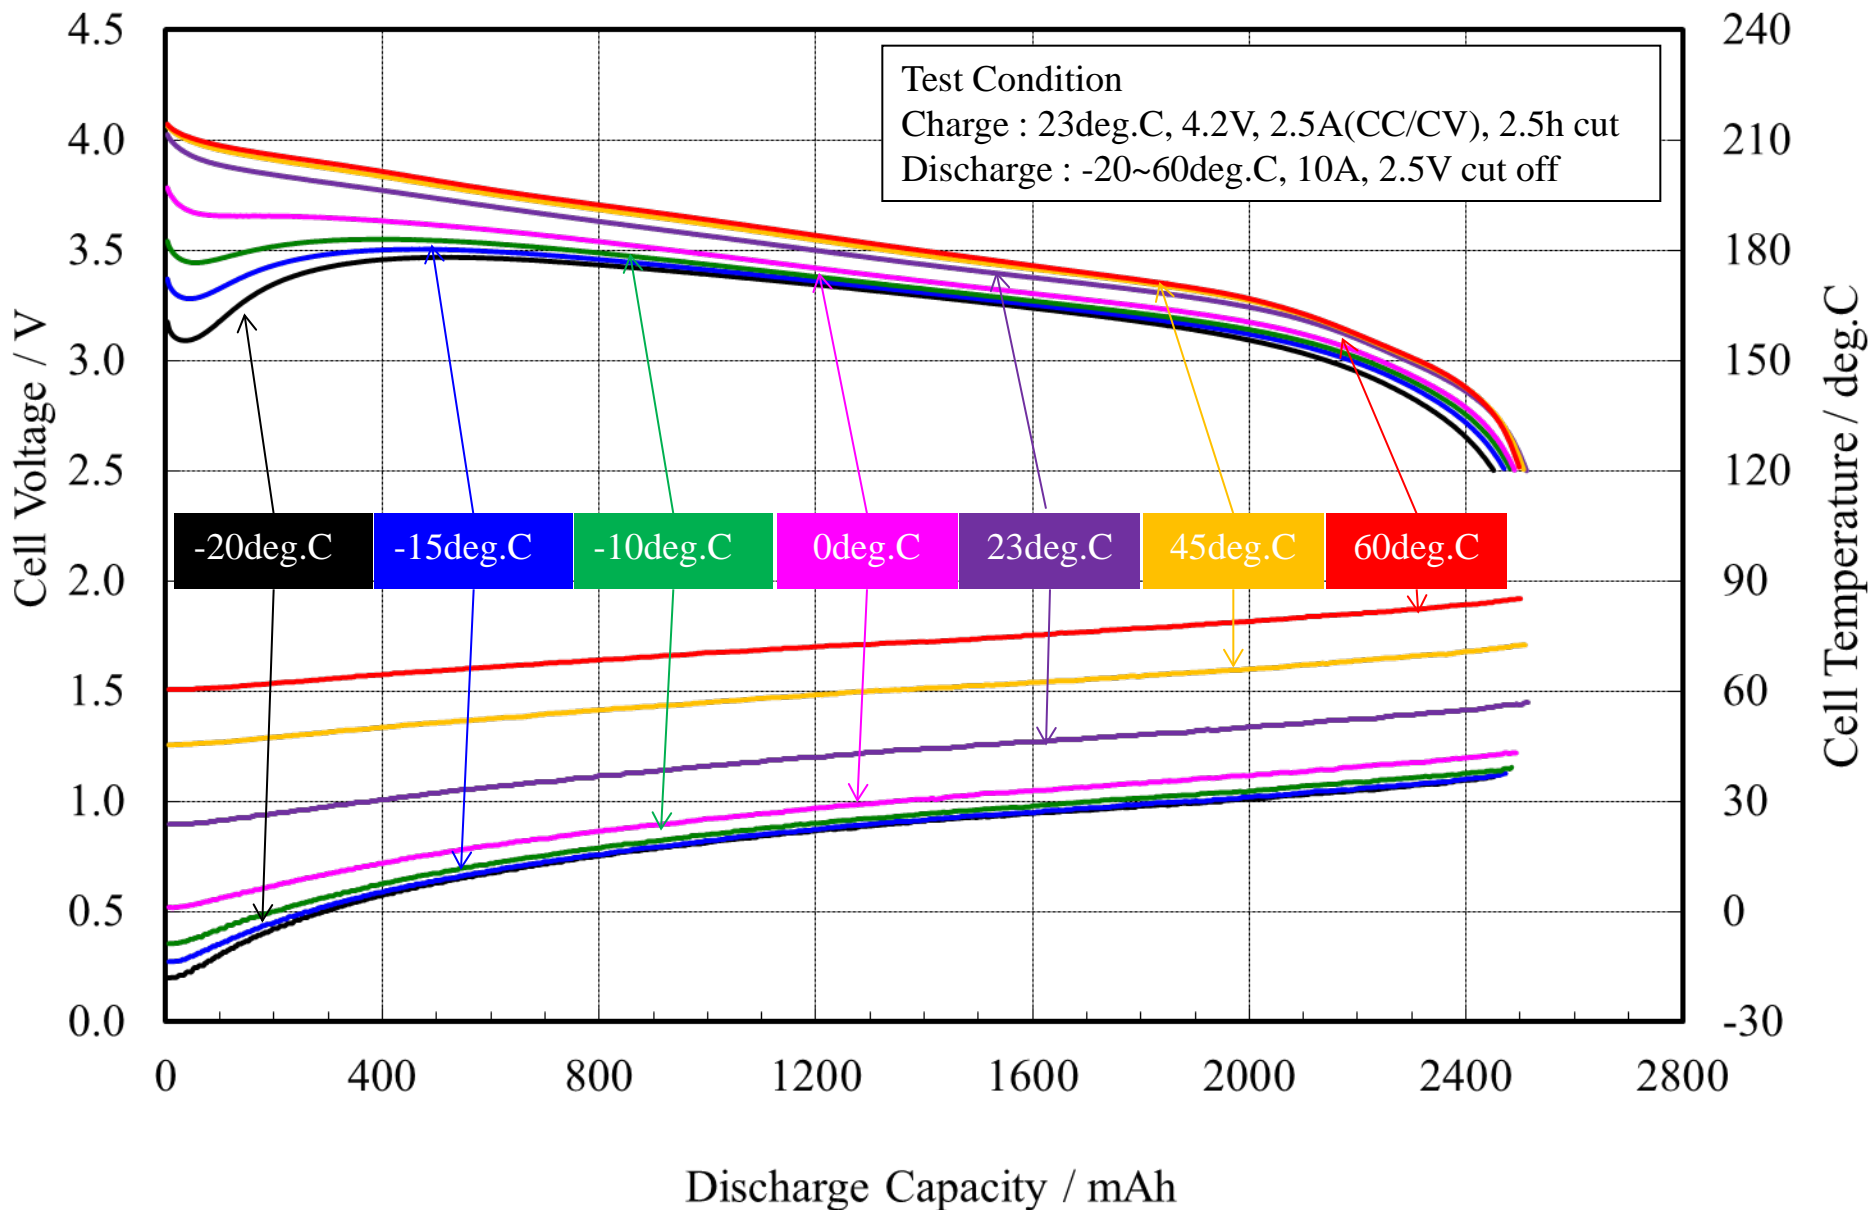

Cycle Life Performance (US18650VTC5A)

10A discharge

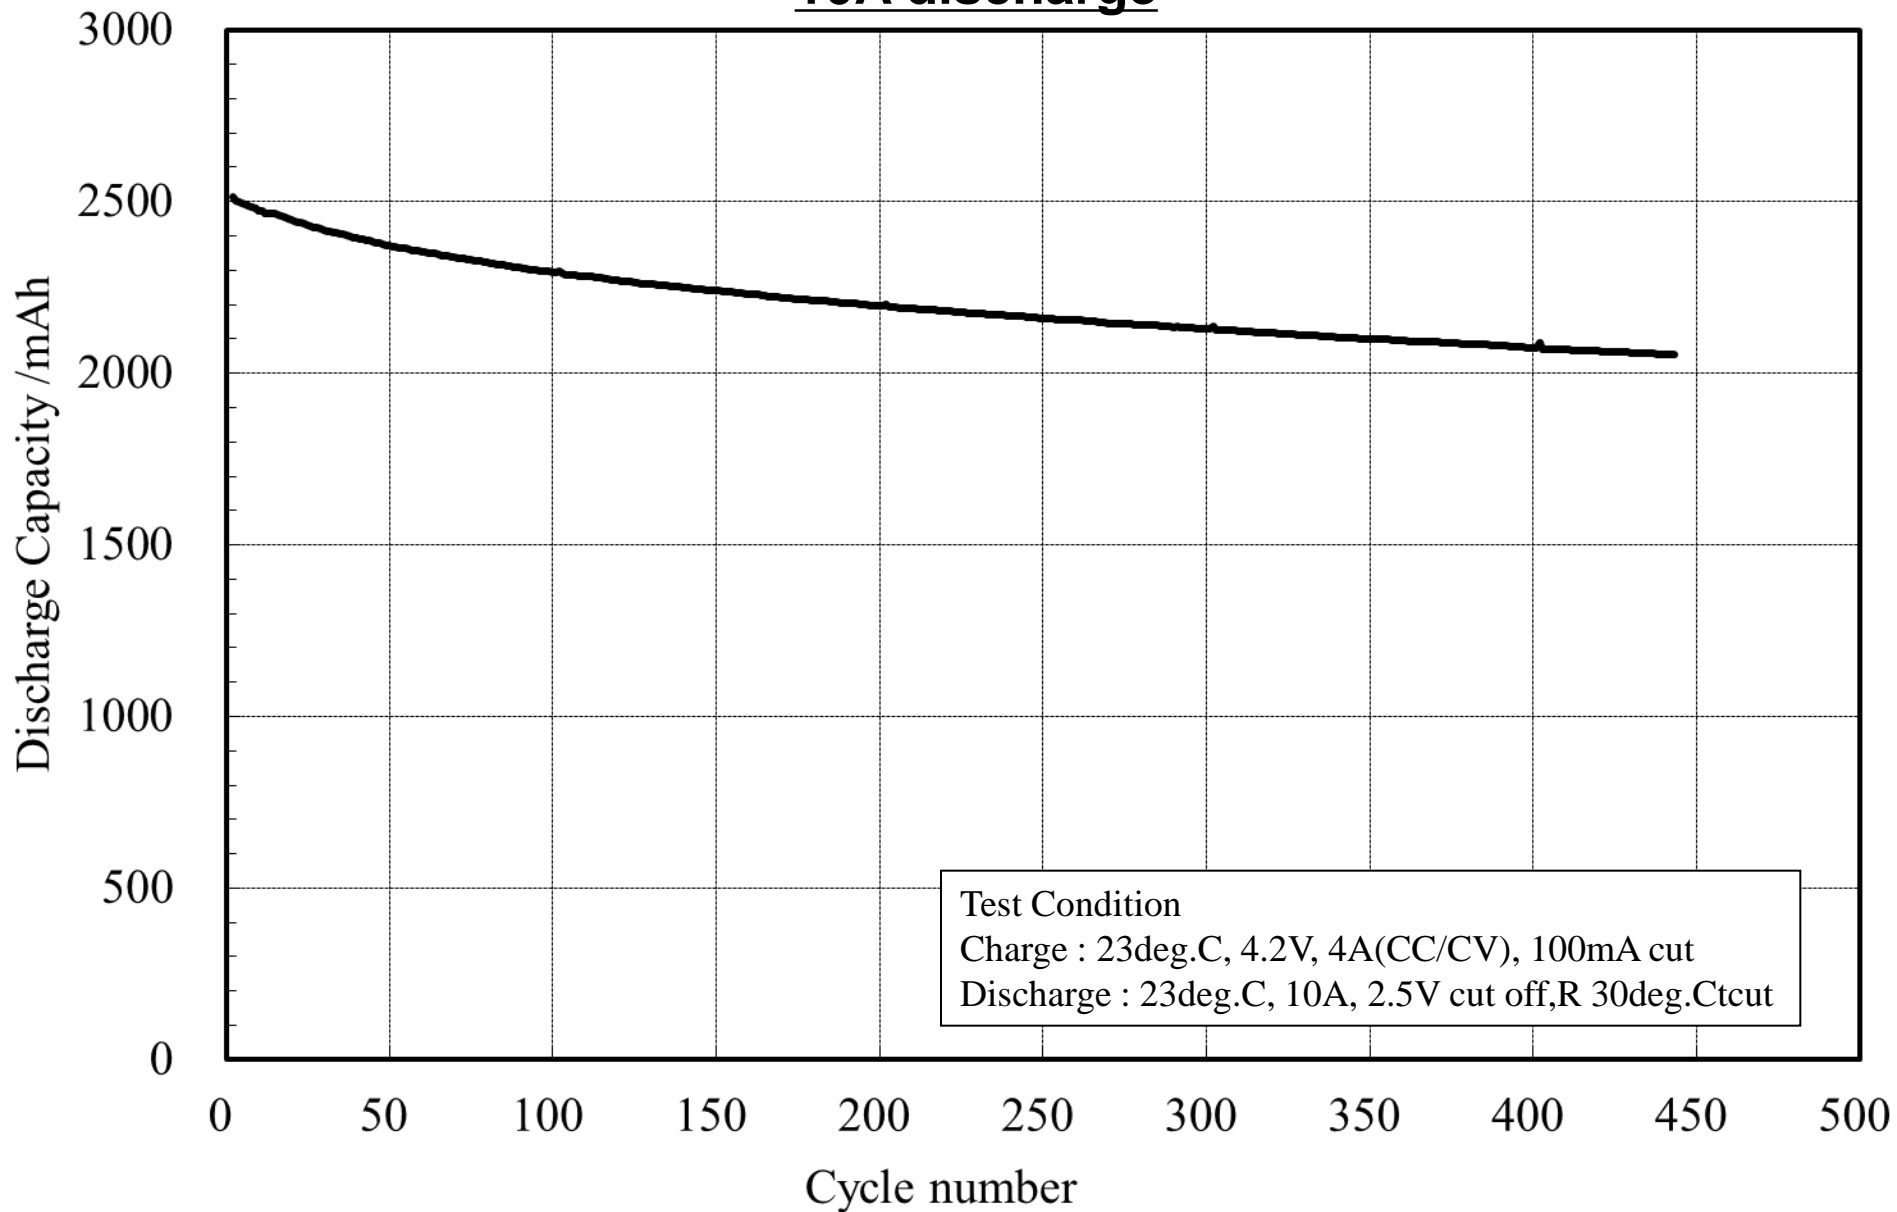

Dimension with Plastic Tube: US18650VTC5A

