

Customer P/N: XXXXXXXXXXXXX RXX

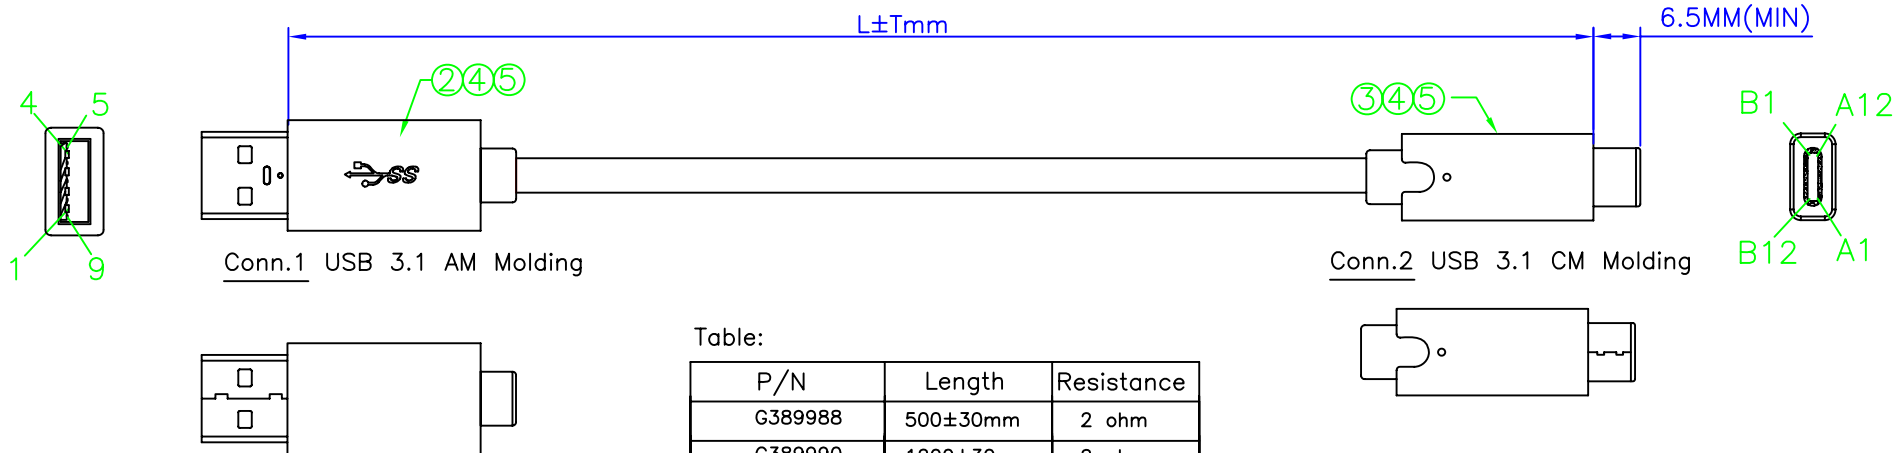


Table:

P/N	Length	Resistance
G389988	500±30mm	2 ohm
G389990	1200±30mm	2 ohm


Electrical Test:

- 100%Test(Open, short ,miss wire)
- Contact Resistance: 2 ohm max.
- Insulation Resistance: 5M ohm min.
- Hi-pot:300V DC/10ms

NOTE:

- Super High Speed USB 3.0 Cable (7/0.08T*1P+D+AL+MYLAR)*2P+7/0.08T*1P+7/0.2T*2C+F+ADB
OD:4.2±0.2mm Color: Black
- USB3.1 (A) M Solder Type Shell Nickel Blue Insulation,
- USB3.1 (C) M Solder Type Shell Nickel, Black Insulation,
- INSIDE MOLDING:PE
- OUTSIDE MOLDING:Black PVC
- CONTACTS:

Pin Assignment

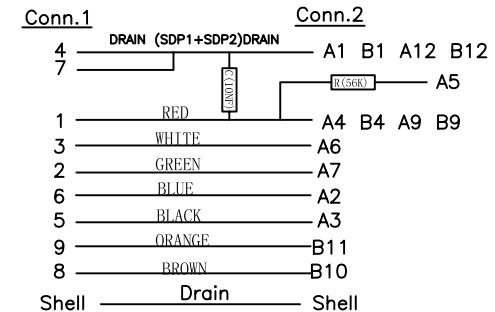

REV.	DATE	CONTENTS OF CHANGE	DESIGNER	TOL ±								APPROVAL	CHECK	DRAWING	DESIGN	DRAWING NAME	USB3.1 A TO C				
				RANGE	Pla	Met	Ins	Por	V	Cab	Pac										Gas
△				0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2					DATE				
△				6~30	0.1	0.1	.15	.25	1	1	0.5	.25					2015-07-29	PART NO.	MF		ROO
△				30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3									
△				80~180	.15	.15	.25	0.3	2	2	1	.45									
△				180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6									
△				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1									

SCALE 1:1 UNIT MM