

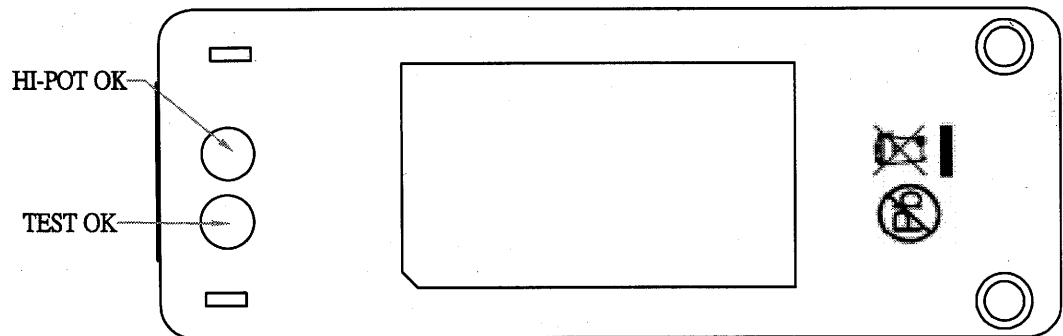


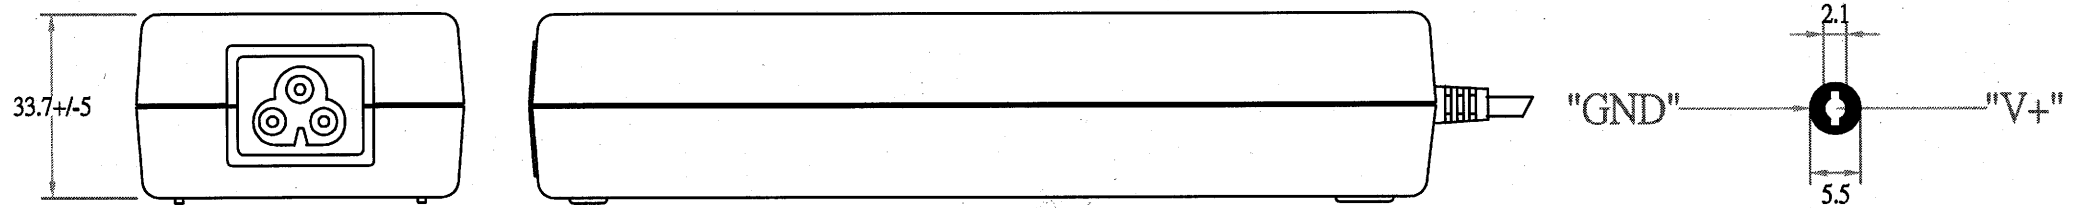

- Features:
- Active PFC
- CEC Efficiency Regulations Compliance(Optional)
- RoHS Compliance
- IEC320 C6 (3PIN)
- Over Voltage Protective Installation
- Over Current Protective Installation
- Protection Type: Auto-Recovery
- Application: POS,LCD, Printer,IT, Scanner,NB

SPECIFICATION

Model	EA10953A	EA10953	EA10953B
Item			
Output Voltage	12V~17V	18V~24V	30.5V
Output Rating (Max.)	80W	90W	90W
Output Current (Max.)	6.6A	4.75A	2.95A
Input Voltage (Limit)	AC 90~264V		
Input Frequency	47~63Hz		
Line Regulation	1% Max.		
Load Regulation	+/- 5%		
Ripple & Noise	2% Max.	1.5% Max.	1.5% Max.
Efficiency	82% Typical	85% Typical	85% Typical
Active PFC	Yes		
Over Voltage Protection	Yes		
Over Current Protection	Yes		
Operating Temperature	0~40°C		
Storage Temperature	-20°C~85°C		
Class or Class	Class		
Safety Standards	UL60950-1, EN60950-1, IEC60950-1		
Safety/EMC	UL/CUL,CE,TUV,FCC,BSMI,DoIR+C-Tick,Gost-R,CB,PSE(15.1~17V),CCC	UL/CUL,CE,TUV,EK,CCC,PSB,FC C,BSMI,DoIR+C-Tick,Gost-R,CB,PSE	CCC
Safety Standards	UL60065, EN60065,IEC60065		
Safety/EMC	UL/CUL, TUV, BSMI,CB		
MTBF	30,000 hours		
LED Indication	Yes		
Dimension	132L x 58.5W x 33.7mm		
Approx. Weight	420 grams		
Standard Plug	Optional		

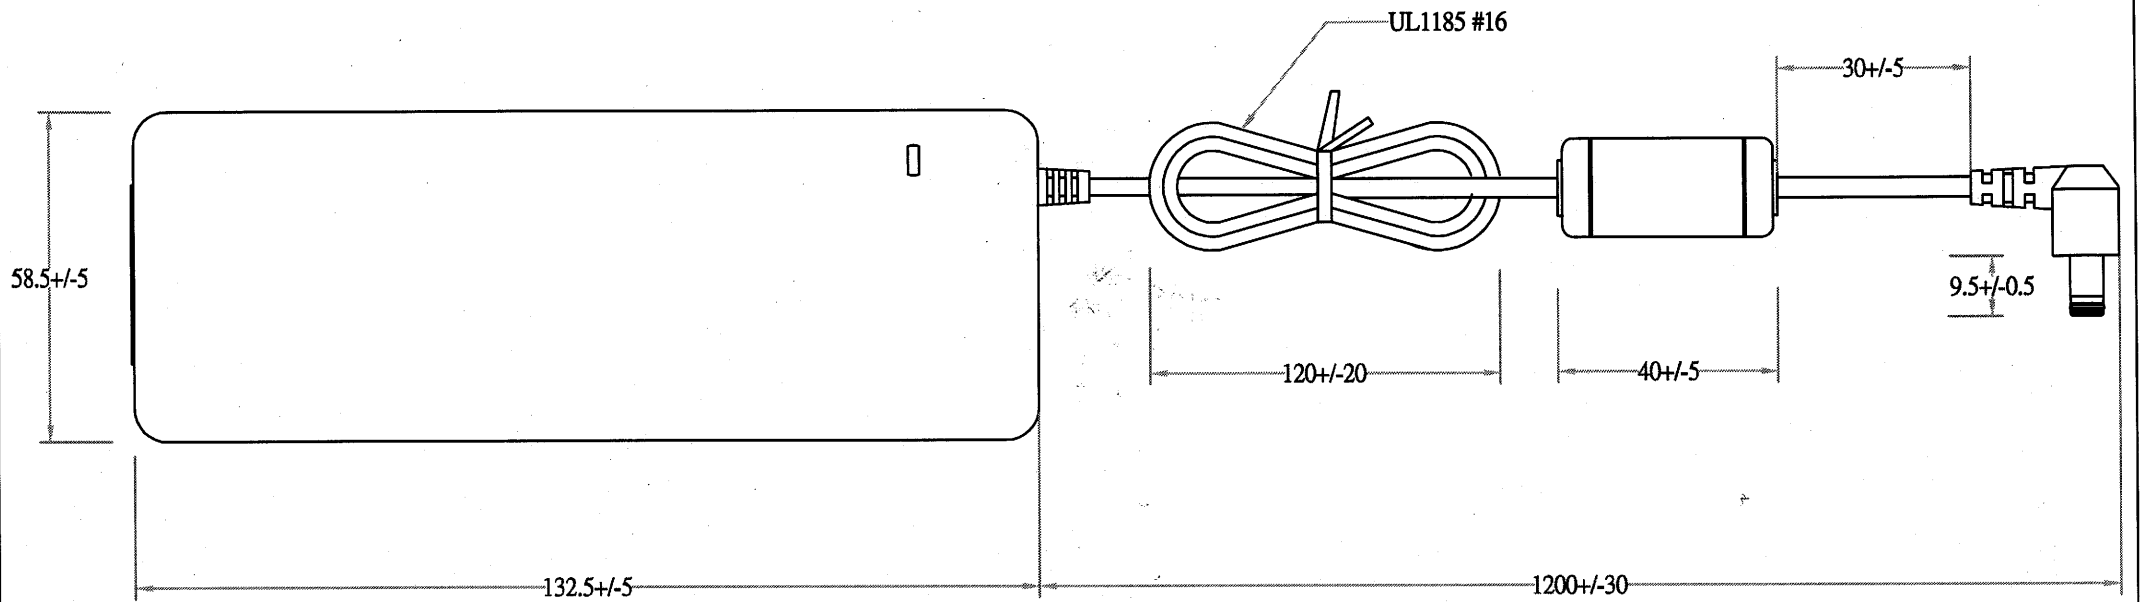

EDAC POWER ELECTRONICS CO., LTD.				APPROVED
MODEL	EA10953(215)	UNIT	mm	DESIGNED
color	BLACK	SCALE		CHECK
cus.		DATE	2006-11-09	DRAWING L.J.YU